GTL Series Load Centers



GTL270S



GTL240S



GTL412C



GTL612F/GTL812F



GTL612FD/GTL812FD

Application:

GT series Load Centers have been designed for safe, reliable distribution and control of electrical power as service entrance equipment in residential, commercial and light industrial premises. They are available in Plug-in designs for indoor applications .

Features:

- Made out of high quality Electro-galvanized steel sheet of up to 1.0-1.5mm thickness.
- Matt-Finish polyester powder coated paint
- Knockouts provided on all sides of the enclosure.
- accept GE's Q Line circuit breakers, including GE's exclusive 1/2" THQPs
- suitable for Single-Phase, Three-Wire, 120/240Vac,rated current to 225A.
- convertible to main breaker
- Wider enclosure offers ease or wiring and move heat dissipation.
- Flush and Surface mounted designs
- Knockouts for cable entry are provided on Top, Bottom of the Enclosure.

Product Number Guide:

GT	M	42	C	G

Series

Type

L=Main lug
LM=Convertible

Maximum Number 1" Spaces


2,4,6……42

Enclosure Type

C=Combination surface/flush
F=Flush
S=Surface
R=Outdoor

Insert for Specials

G=Factory installed ground bar
M=Factory installed base of main breaker
FL=Factory installed feed-through lugs

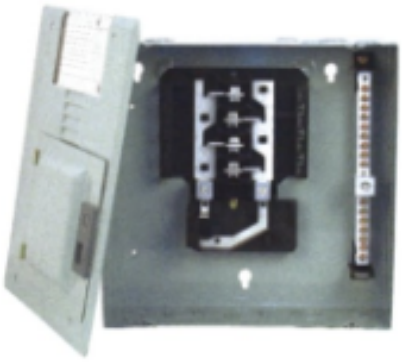

GTL612FM/GTL812FM



GTL1212CM