

346830

Video adapter with 2 DIN modular housing. For connecting 3 BUS to the system. It is therefore possible to install systems with 2 video entrance panels and 1 riser, as well as systems with one video entrance panel and 2 risers. The device must be used with system power supply, item 346000

Technical features

Brand	BTicino
Modules	2
Series	Accessories

Technical documentation

? DWG drawing

? Technical Data Sheet

We, BTicino S.p.A Viale Borri 231 21100 Varese (Italy), declare that all items listed in BTicino catalogues, have been manufactured in compliance with the principal elements of safety objectives of European Directive said LVD: 2014/35/EU: 26 February 2014 and, where requested, also in compliance with essential protection requirements of electromagnetic compatibility according to European Directive 2014/30/EU: 26 February 2014, and/or where requested also in compliance with 1995/5/CE: 9 March 1999 “R&TTE” or where requested also in compliance with 2014/53/EU: 16 April 2014 “RED”. BTicino S.p.A. products are in compliance with the standard published by the International Electrotechnical Commission (IEC). The compliance can be proved by Certificates issued by organizations recognized by IEC according to the CB-scheme. Our items comply with relevant European Product- Standards and show, whether provided, CE marking, they have been constructed in accordance with good engineering practice in safety matters in force in the Community, they do not endanger the safety of persons, domestic animals or property when properly installed and maintained and used in applications for which they were made.

Video adapter

346830

Description

2 WIRES video adapter that must be used wih the power supply 346000 in the installation of video systems (or audio/video combined), video door entry systems and sound systems.
Allows the connection to its 3 BUS clamps. Hence it is possible to realize installations with 2 video entrance panels and 1 riser and installations with 1 video entrance panel and 2 risers.
The device must be installed next to the system power supply 346000.
The device must not be configured.

Related items


346000 (2 WIRE system power supply)

Technical data

Power supply from SCS BUS: 18 - 27 Vdc
Operating temperature: 5 - 40°C

Dimensional data

2 DIN modules.

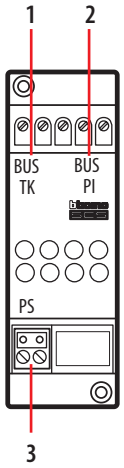

Legend

1 - BUS TK output towards the EP (fixed clamp entrance panels)
2 - BUS output towards the handsets (fixed clamp handsets)
3 - BUS PS input from the power supply (removable clamp)