Flush-mounting switchboards

linea SPACE



F315P8

F315PB24



F315S8

F315SC8

IEC 60670-24 compliant
IP40 and IK08 (6 joules) protection
Thermoplastic resin material
Insulation class II ⧈
White RAL 9003 and Smoke finishings solutions
Temperature range: -25 to 85 °C
Resistance to abnormal heat and to fire (EN 60695-2-11):
650 °C (concrete version) 850 °C (plasterboard version)
Rail type: DIN35: Galvanized steel
Panels (with screw at 1/4 turn) and removable frame for more than 18 modules per row
Knockouts for 16 to 32mm (diameter) pipes
Reversible door opening to 180 °
Common boxes for Linea SPACE and Linea HABITA series
Flush mounted box to be ordered separately (plasterboard version with all specifi c accessories supplied)

Item code

WHITE DOOR SWITCHBOARDS

Switchboard	Concrete box	Plasterboard box	N° of modules	LxAxP (mm)	Pw (W)
F315PB8	**F315S8**	**F315SC8**	8	286x208x100	22
F315PB12	**F315S12**	**F315SC12**	12	359x246x100	26
F315PB18	**F315S18**	**F315SC18**	18	493x288x105	41
F315PB24	**F315S24**	**F315SC24**	2x12	359x396x105	40
F315PB36D3	**F315S36D3**	**F315SC36D3**	3x12	359x546x105	57
F315PB36D2	**F315S36D2**	**F315SC36D2**	2x18	493x496x105	62
F315PB54	**F315S54**	**F315SC54**	3x18	493x650x111	70
F315PB72	**F315S72**	**F315SC72**	4x18	493x800x111	78

SMOKE DOOR SWITCHBOARDS

Switchboard	Concrete box	Plasterboard box	N° of modules	LxAxP (mm)	Pw (W)
F315P8	**F315S8**	**F315SC8**	8	286x208x100	22
F315P12	**F315S12**	**F315SC12**	12	359x246x100	26
F315P18	**F315S18**	**F315SC18**	18	493x288x105	41
F315P24	**F315S24**	**F315SC24**	2x12	359x396x105	40
F315P36D3	**F315S36D3**	**F315SC36D3**	3x12	359x546x105	57
F315P36D2	**F315S36D2**	**F315SC36D2**	2x18	493x496x105	62
F315P54	**F315S54**	**F315SC54**	3x18	493x650x111	70
F315P72	**F315S72**	**F315SC72**	4x18	493x800x111	78

Item code

TERMINAL STRIPS


	N° of conductors	Section (mm²)	Colour
FMM8N	8	16	blue/neutral
FMM8T	8	16	green/ground
FMM22N	22	21x16+1x25	blue/neutral
FMM22T	22	21x16+1x25	green/ground

ACCESSORIES

F107NC1	Key lock compatible with Linea SPACE, Linea HABITA series and IDROBOARD
F315KAS	Coupling kits for flush mounted boxes from 8 to 36 modules (not to be used with boxes F215 /6S)
F215FP	9 mm blank module (1/2 module) - RAL 9003 white finishing - 5 modules
F315HZ8	Horizontal Isolation plate for units of 18 modules per row
F315P18F	Perforated plate for units of 18 modules per row
F315P18P	Full plate for units of 18 modules per row


DIMENSIONS

LINEA SPACE



Item code	Dimensions (mm)		
	A	B	C
F315...8	286	208	20
F315...12	359	246	20
F315...18	493	288	20
F315...24	359	396	20
F315...36D3	359	546	20
F315...36D2	493	496	20
F315...54	493	650	20
F315...72	493	800	20

BOX

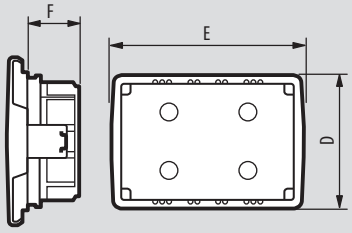

Item code	Dimensions (mm)		
	D	E	F
F315S.8	186	232	80
F315S.12	222	304	80
F315S.18	248	436	85
F315S.24	372	304	85
F315S.36D3	522	304	85
F315S.36D2	456	436	85
F315S.54	606	436	91
F315S.72	756	436	91